


Bright, Feature-Rich and Portable

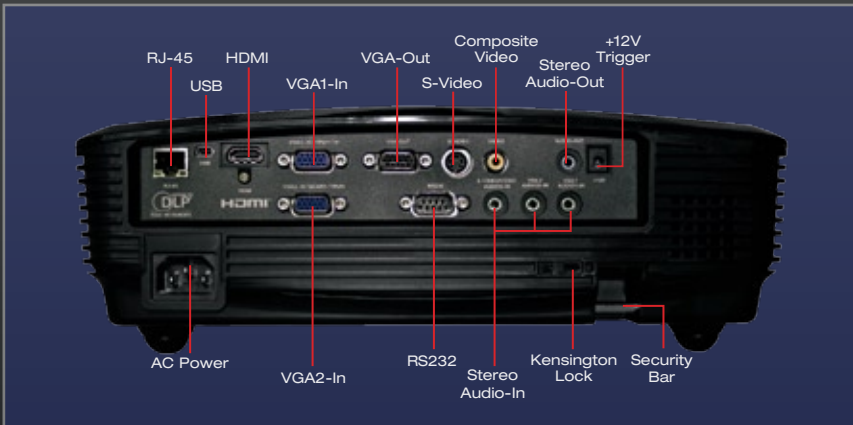

Robustly featured and powerfully portable, the Optoma TX762 is designed for maximum versatility and low-cost operation. With 4000 ANSI lumens and an 8-watt speaker, the TX762 delivers exceptional brightness and rich audio wherever the presentation - in large conference rooms, meeting rooms, training facilities or classrooms. With extensive connectivity options, including RJ45 for remote management and control, the TX762 is ready for the most demanding applications.

3D content can be viewed with active LCD shutter glasses when the projector is connected to a computer with a compatible 3D graphics card. Please visit www.optoma.com for more information.

TX762 FEATURES


- ❑ Easy-to-read text - bright at 4000 ANSI lumens; high contrast ratio of 3000:1
- ❑ Standby VGA and audio pass-thru feature reduce power consumption
- ❑ Built-in 8-watt speaker
- ❑ Remote control and management via RS-232 or RJ45
- ❑ Broad range of audio and video connectivity

TX762 | Multimedia Projector

Projection Distance/Image Size

| Projection Distance (Feet) | Maximum Diagonal (Inches) | Minimum Diagonal (Inches) |
|----------------------------|---------------------------|---------------------------|
| 6 | 56 | 47 |
| 8 | 75 | 63 |
| 10 | 94 | 78 |
| 12 | 113 | 94 |
| 14 | 131 | 109 |
| 16 | 150 | 125 |
| 18 | 169 | 141 |

Control Panel

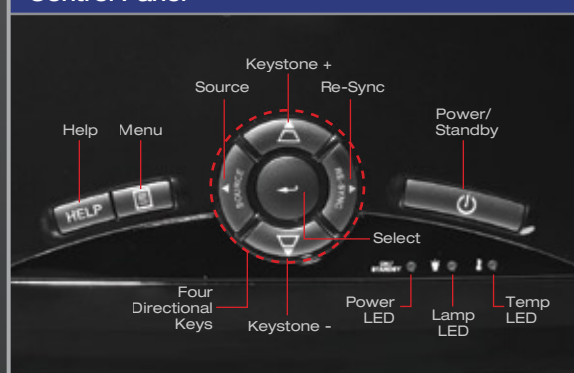

Optional Accessories

| | |
|---|-------------|
| Lamp: | BL-FP280D |
| Remote Control: | BR-5030L |
| Carrying Case: | BK-4028 |
| Wireless Dongle: | BI-EXTGB |
| Power Cord (1m): | BC-PUPIXY01 |
| Power Cord (11m): | BC-PUPIXY11 |
| HDMI Cable (7.5m): | BC-HMHMXX08 |
| Composite Cable (1.8m): | BC-COCOXX02 |
| VGA Cable (1.8m): | BC-VGVGXX02 |
| VGA Cable (5m): | BC-VGVGXX05 |
| VGA to Component Adapter: | BC-VGCRXY00 |
| Ceiling Mount: | BM-5001U |
| 100" Matte White 4:3 Manual Pull Down Screen: | DS-3100PMG+ |

Specifications

| | |
|---------------------------|--|
| Display Technology: | Single 0.55" DMD DLP® Technology by Texas Instruments |
| Resolution: | Native (1024 x 768) |
| Maximum Resolution: | UXGA (1600 x 1200) |
| Brightness (Typical): | 4000 ANSI Lumens |
| Contrast Ratio: | 3000:1 (Full On/Full Off) |
| Lamp Type: | 280W P-VIP |
| Lamp Life (STD/Bright)*: | Estimated at 3000/2000 Hours |
| Throw Ratio: | 1.6 to 1.92:1 (Distance/Width) |
| Image Size (Diagonal): | 30" to 307" (0.92 to 9.21 m) |
| Projection Distance: | 3.93' to 32.8' (1.2 to 10 m) |
| Noise Level (STD/Bright): | 29dB/31dB |
| Remote Control: | Fully Featured Remote with Laser Pointer and Mouse Functions |
| Computer Compatibility: | UXGA, WXGA, SXGA+, SXGA, XGA, SVGA, VGA Resized, VESA, PC and Macintosh Compatible |
| Video Compatibility: | NTSC, PAL, SECAM, SDTV (480i), EDTV (480p), HDTV (720p, 1080i/p) |
| 3D Compatibility: | 120Hz Frame Sequential 3D for Resolutions Up to 720p, 60Hz Field Sequential 3D for Resolutions Up to 480i |
| Aspect Ratio: | 4:3 Native, 16:9 & 16:10 Compatible |
| Projection Lens: | F=2.4~2.66, f=18.2~21.8 mm, 1.2x Zoom & Focus |
| Offset: | 115% |
| Loop Through: | Monitor: D-Sub 15-Pin VGA Output Audio: Stereo Mini-Jack Output (Functional in Both Normal and Standby Modes) |
| User Controls: | Complete On-Screen Menu Adjustments in 23 Languages |
| Audio: | 8-Watt Stereo Speaker |
| Keystone Correction: | ± 40° Vertical |
| Vertical Refresh Rate: | 24 to 120 Hz |
| Horizontal Scan Rate: | 15.3 to 91.1 KHz |
| Power Supply: | AC Input 100-240V, 50-60 Hz, Auto-Switching |
| Power Consumption: | 372 Watts Max (Bright), 314 Watts (STD) <1 Watt (Standby) |
| Weight: | 6.4 lbs (2.9 kg) |
| Dimensions (W x H x D): | 12.76" x 3.82" x 9.21" (324 x 97 x 234 mm) |
| Operating Temperature: | 41° to 104°F (5° to 40°C), 80% Max Humidity, Adjustable Fan Speed for High Altitude Application |
| Displayable Colors: | 1.07 Billion |
| Projection Method: | Front, Rear, Ceiling Mount, Table Top |
| Uniformity: | 85% |
| Security: | Kensington® Lock, Keypad Lock and Security Bar |
| I/O Connectors: | HDMI, Two VGA-In, VGA-Out, S-Video, Composite Video, Three Stereo Audio-In, Stereo Audio-Out, +12V Trigger, USB, RS-232 and RJ45 |
| Standard Accessories: | AC Power Cord, VGA to VGA Cable, Remote Control, Batteries for Remote, USB Cable, Carrying Case, Lens Cap, Multilingual CD-ROM User's Manual, Quick Start Card and Warranty Card |
| Optional Accessories: | Wireless Dongle, Ceiling Mount, HDMI Cable, VGA to Component Cable, S-Video Cable, Composite Video Cable, RS-232 Cable and Panoview™ Series Screens |
| Warranty: | Three Years Optoma Express Replacement Service, One Year on Lamp |
| UPC: | 796435 41132 9 |

www.optoma.com

*Lamp life is dependent upon many factors, including lamp mode, display mode, usage, environmental conditions and more. Lamp brightness can decrease over time.



All Specifications are subject to change without notice. ©2010 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments. All other names mentioned herein are property of their respective owners.