

# 1080p Professional Installation Laser Projector

ZH506-W

Bright, compact and virtually maintenance-free



- Bright 5,000 ANSI lumens and 1080p resolution
- 4K UHD HDR input with HDMI 2.0 (HDCP 2.2)
- Light source life up to 30,000 hrs
- Vertical lens shift with four corner correction
- LAN and RS232 control with Crestron, Extron, AMX and Telnet compatibility
- 360° and portrait mode operation
- Stereo speakers with 10W per channel

PRO|SCENE



1080p



Full 3D



Brighten any room with razor-sharp, 5,000 lumen, 1080p projection with the remarkable Optoma ProScene ZH506. A laser light source eliminates lamp and filter replacements for up to 30,000 hours of low-cost and virtually maintenance-free operation.

Compact size, low weight and quiet operation make it perfect for boardrooms, higher education, houses of worship and entertainment venues. Vertical lens shift, four corner correction, 360° and portrait mode operation enable flexible installations.

HDMI and VGA inputs provide connectivity to high-quality 4K HDR digital video or legacy analog video sources while LAN and RS-232 enable control via Crestron, Extron, AMX or Telnet. Stereo speakers with 10W per channel provide rich audio for all-in-one applications.

## CONNECTIVITY (May require optional accessories)



Computers



Smart Phones



Tablets



3D Blu-ray/DVD Players



Camcorders



Apple TV®



Chromecast™

# 1080p Professional Installation Laser Projector - ZH506-W

## OPTICAL/TECHNICAL SPECIFICATIONS

<b>Display Technology</b>	Texas Instruments™ 0.65" 1080p DMD
<b>Color Wheel</b>	4 segment RGBY
<b>Native Resolution</b>	1080p
<b>Maximum Resolution</b>	4K UHD (3840 x 2160 @ 60Hz)
<b>Brightness</b>	5,000 ANSI lumens
<b>Contrast Ratio</b>	300,000:1 (Extreme Black enabled) 1,800:1 full on/full off
<b>Displayable Colors</b>	1.07 billion
<b>Lamp Life and Type*</b>	Up to 30,000 hrs (Eco), 20,000 hrs (Bright)
<b>Light Source Type*</b>	Laser Phosphor
<b>Projection Method</b>	360, front, rear, ceiling mount, table top
<b>Keystone Correction</b>	±30° horizontal and vertical
<b>Geometry</b>	Four corner adjustment
<b>Lens Shift</b>	15% vertical
<b>Uniformity</b>	80%
<b>Offset</b>	103%-118% ±5%
<b>Aspect Ratio</b>	16:9 (native) 4:3 compatible
<b>Throw Ratio</b>	1.40-2.24:1
<b>Projection Distance</b>	3.28'- 32.8
<b>Image Size</b>	20.2" – 322.6"
<b>Projection Lens</b>	F=2.5-3.26 f=20.91-32.62
<b>Optical Zoom</b>	1.6x
<b>Digital Zoom</b>	0.8 - 2.0x
<b>Audio</b>	2 x 10W (stereo)
<b>Noise Level</b>	36db (Normal) / 30db (Eco)
<b>Remote Control</b>	Full size remote with laser pointer
<b>360 degree and Portrait mode operation</b>	Yes
<b>Operating Temperature</b>	41–104°F (5–40°C), 85% max humidity
<b>Power Supply</b>	AC input 100–240V, 50–60Hz, auto-switching
<b>Power Consumption</b>	353W ±15% (Full), 321W±15% (Eco)
<b>High Altitude</b>	Operating temperature at sea level up to 10,000 feet = 104° F (max); Must manually switch to high altitude mode from 5,000 feet and above (using OSD menu) to maintain optimal functionality.

## COMPATIBILITY SPECIFICATIONS

<b>Computer Compatibility</b>	VGA, SVGA, HDTV(720P), WXGA, WXGA+, SXGA, SXGA+, UXGA, HDTV(1080p), WUXGA
<b>Video Input Compatibility</b>	PAL, SECAM, 576i/p, NTSC, 480i/p, HDTV 720p/1080i/1080p 4K UHD 2160p (24/50/60 Hz)
<b>3D Compatibility†</b>	Supports all HDMI 1.4a mandatory 3D formats (Frame pack, side-by-side, top-bottom) and up converts frame rate from 60Hz to 120Hz or 24Hz to 144Hz (i.e. 60 or 72 frames per eye). 3D glasses are needed and sold separately. Refer to user manual for details.
<b>Vertical Scan Rate</b>	24 ~ 85 Hz
<b>Horizontal Scan Rate</b>	15.375 ~ 91.146 KHz
<b>User Controls</b>	Graphic user interface and on-screen menu in 27 languages
<b>I/O Connection Ports</b>	2x HDMI 1.4 (HDMI 2 MHL), 1x composite, 1x VGA, 1x audio in, 1x mic/audio in, 1x USB-A (power), 1x VGA out (VGA 1 only), 1x audio out, 1x 12v trigger
<b>Control</b>	1x RJ-45, 1x RS-232C
<b>Loop Through (Audio)</b>	Yes


## PHYSICAL SPECIFICATIONS

<b>Security</b>	Kensington® lock port, password (OSD)
<b>Weight</b>	12.12 lbs
<b>Dimensions (W x H x D)</b>	14.7" x 4.6" x 11.9"


Light source life is dependent on brightness mode, display mode, usage, environmental conditions and more. Light source brightness can decrease over time.

Watching 3D projection while wearing 3D glasses for an extended period of time may cause headaches or fatigue. If you experience a headache, fatigue or dizziness, stop viewing the 3D projection and rest.

Portrait orientation must follow the recommended positions. Please consult the user manual for further information.

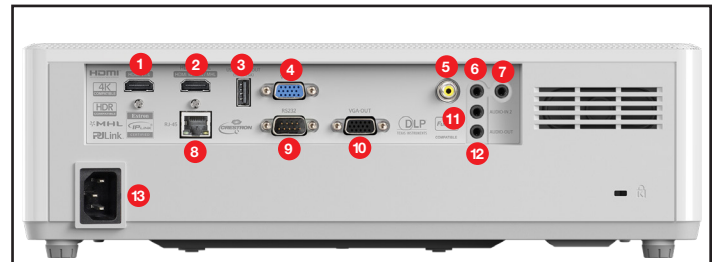

- |                  |                    |                |
|------------------|--------------------|----------------|
| 1. HDMI 2        | 6. Audio-In/Mic-In | 11. Audio-In 2 |
| 2. HDMI 1/MHL    | 7. 12V-Out         | 12. Audio-Out  |
| 3. USB Power-Out | 8. RJ-45           | 13. AC Power   |
| 4. Service       | 9. RS232           | 14. Lock       |
| 5. VGA-In        | 10. VGA-Out        |                |

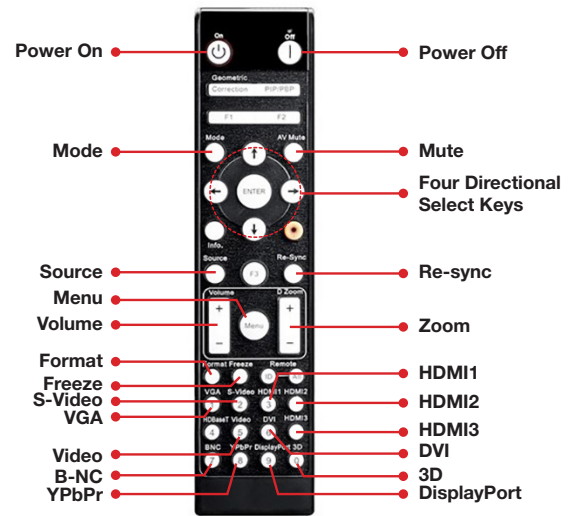

### Warranty

3 Year parts and labor limited warranty on the projector, 5-year or 12,000 hour light source warranty (whichever comes first)

### What's in the Box

ZH506-W, AC power cable, remote control, batteries, quick start user manual

### Accessories

Universal ceiling mount: BM-5001U  
 Remote: BR-3075W  
 QuickCast Pro 4K HDMI starter kit: QCP-SK-4K-HDMI (1 TX and 1 RX)  
 QuickCast Pro 4K HDMI starter kit: QCP-4K-KIT (2 TX, 1 RX, 1 Cradle)

UPC 796435 44 347 4

Optoma.com



Copyright © 2019 Optoma Technology, Inc. DLP® and the DLP logo are registered trademarks of Texas Instruments™. All other trademarks are the property of their respective owners. All specifications subject to change at any time. 10212020